



MV 630F VacSmart™ – Double Chamber Vacuum Sealer with Advanced HACCP Features

1832 N Glassell St · Orange, California 92865
1-888-MINIPAC · www.vac-smart.com



MV 630F VacSmart™ – Double Chamber Vacuum Sealer with Advanced HACCP Features

FEATURES

- Two seal bars at 25.5"
- Flat deck for easy cleaning
- Lid Height 7.25"
- Dual round seal
- Post-mounted swivel display
- Front handle
- Multi-range 190-240V
- Air assist ready
- Pump heat deflector
- Leveling legs + wheels for mobility
- Inert gas ready
- Ethernet, USB, and Thermocouple connectivity
- TruVac™ sensors for hold + vacuum pulse infusion

SOFTWARE

- 6 speed keys
- 999+ product look-ups
- Selectable vacuum display in mbar or %
- HACCP Plan included at www.HACCP-Portal.com
- Fragile food protection with controlled air return

ADVANCED HACCP FEATURES

- E-data reporting with PDF file download
 - Operator, product, date/time, batch number
 - County of origin, supplier information, pH level, temperature
 - Immediate corrective action entry at vacuum machine
- Sanitation alerts
 - Food type change (i.e. beef - fish - beef)
 - 4-hour operation sanitation prompt
 - Air dry sanitation instructions
- Programmable label printer (optional)
 - Product name, packed date and use by date
 - Ingredients, product handling message, operator name
 - Sequential number, address, barcode, etc.

MODEL


- MV 630F VacSmart™

Flat Deck | Front & Back Seal Bars

MV 630F VacSmart



3 x 8" bags per sealing bar or
2 x 12" bags per sealing bar:

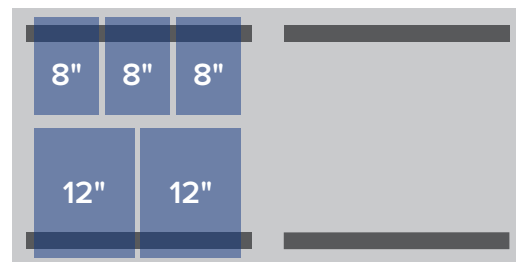

OPTIONS

- 208 volts, 50-60 Hz, 3-phase, 63 m³/h
- 220 volts, 50-60 Hz, single phase, 63 m³/h
- Inert gas kit - N₂/CO₂/AR injection (8 nozzles)
- Round seal + excess bag trimmer



1832 N Glassell St · Orange, California 92865
 1-888-MINIPAC · www.vac-smart.com


MV 630F VacSmart™ – Double Chamber Vacuum Sealer with Advanced HACCP Features




MV 630F VacSmart™ – Double Chamber Vacuum Sealer with Advanced HACCP Features

ACCESSORIES


- 1. Direct thermal label printer (203 dpi)
- 2. Water-resistant flexible keyboard
- 3. K-Type needle temperature probe



1



2



3

TECHNICAL SPECIFICATIONS

- Linux embedded operating system
- 5" LCD touch screen display, resistive type
- ARM Cortex A7 quad-core processor
- 1GB LPDDR2 RAM memory
- 8GB microSD storage
- WiFi & Bluetooth connectivity
- 10/100 Mbps Ethernet port
- Two USB 2.0 ports
- Two thermocouple ports

POWER

- 100 m³/h Busch® vacuum pump
- 190-240 volts, 50-60 Hz, 3-phase
- 23 amps

SHIPPING

- Shipping dimensions 75" x 40" x 65"H
- Shipping weight 1168 lbs

DETAILS AND DIMENSIONS

